

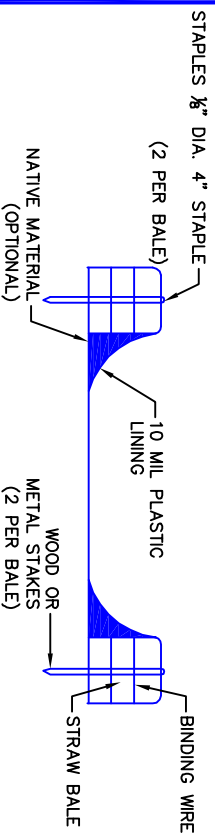


STRAW BALE BARRIER CONCRETE WASHOUT

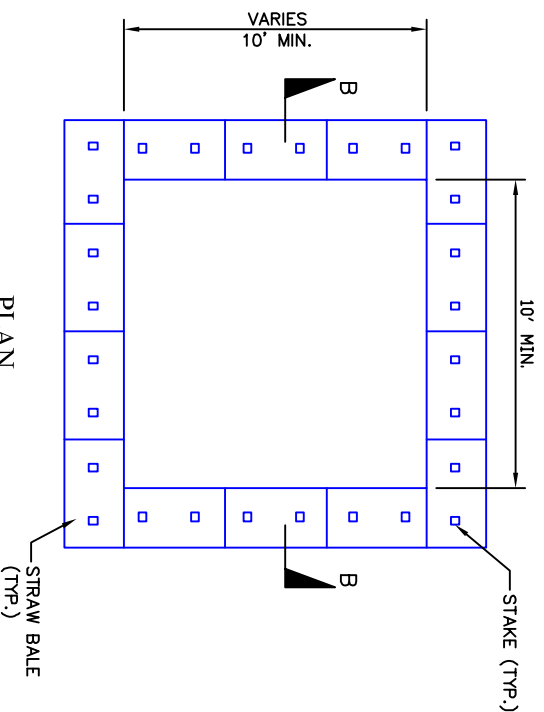

SECTION B-B
NOT TO SCALE

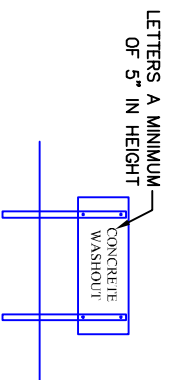


CONCRETE WASHOUT SIGN DETAIL
NOT TO SCALE


NOTES:

1. ACTUAL LAYOUT DETERMINED IN FIELD.
2. INSTALL CONCRETE WASHOUT SIGN (24"x24", MINIMUM) WITHIN 30' OF THE TEMPORARY CONCRETE WASHOUT FACILITY.
3. TEMPORARY WASHOUT AREA MUST BE AT LEAST 50' FROM A STORM DRAIN, CREEK BANK OR PERIMETER CONTROL.
4. CLEAN OUT CONCRETE WASHOUT AREA WHEN 50% FULL.


EXCAVATED PIT CONCRETE WASHOUT

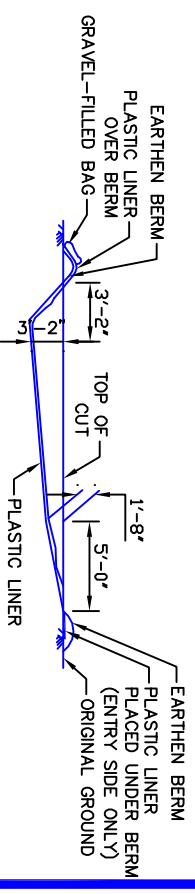

SECTION B-B
NOT TO SCALE

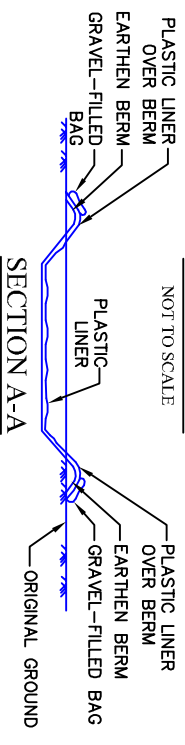

SECTION A-A
NOT TO SCALE

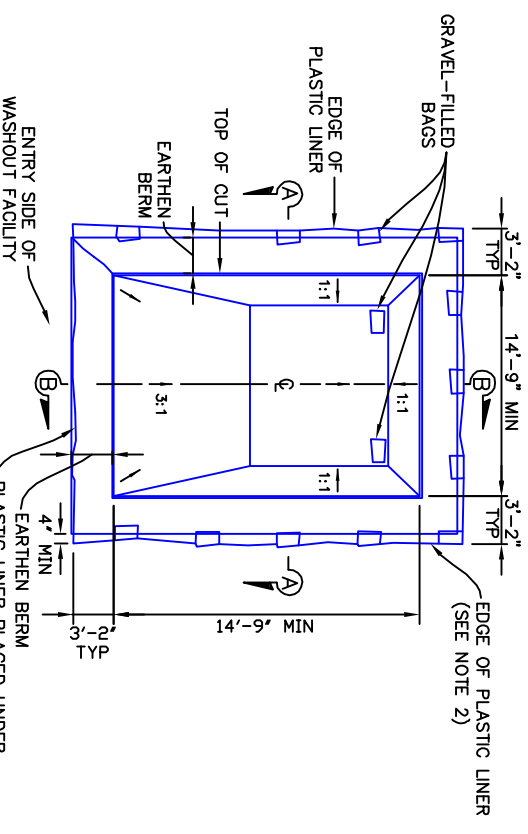

TEMPORARY CONCRETE WASHOUT
NOT TO SCALE



Greenville County
Storm Water Management

CONCRETE WASHOUT DETAIL

STANDARD DRAWING NO.

SC-14

APPROVED BY:

GREENVILLE COUNTY STORM WATER MANAGEMENT

JANUARY 2013